




SEA BOX[®]

40' X 8' 6" Refrigerated ISO Cargo Container

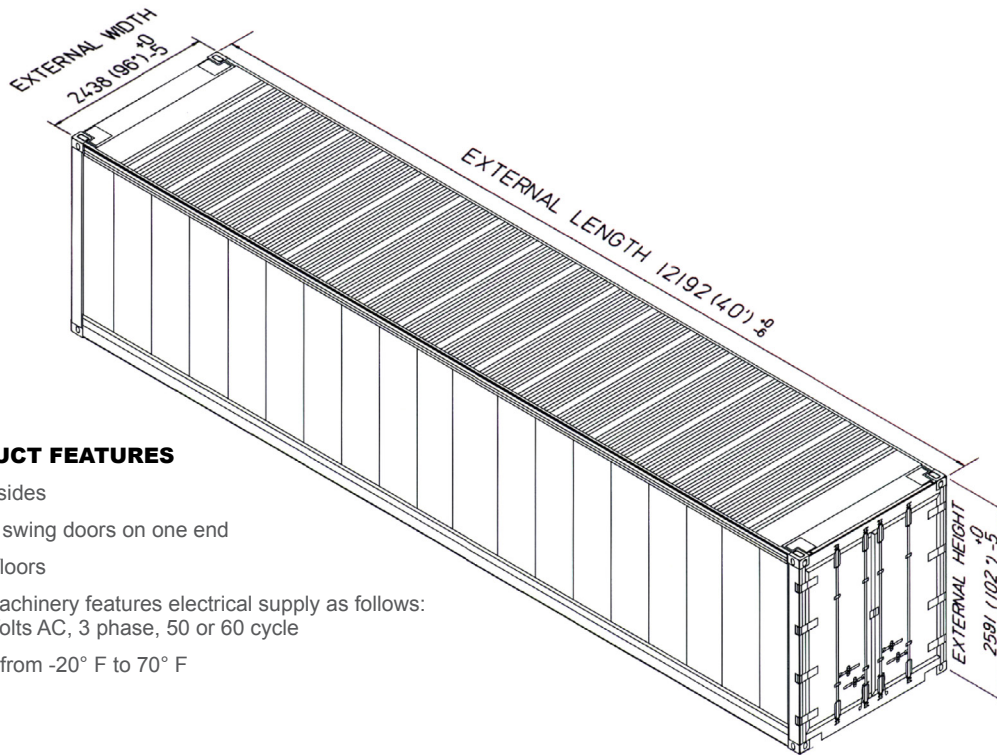

STANDARD PRODUCT FEATURES

- Aluminum, steel or sides
- Double full opening swing doors on one end
- Aluminum T-grade floors
- Most refrigerated machinery features electrical supply as follows:
208/230, 380/460 Volts AC, 3 phase, 50 or 60 cycle
- Temperature range from -20° F to 70° F

SB561-6
 40' X 8' 6" Refrigerated ISO Cargo Container

000000-R00

ISO 9001:2008



CERTIFIED QUALITY
MANAGEMENT SYSTEM

CONTRACT # GS-02F-0024P
GSA Advantage![™]

ALL NEW CONTAINERS ARE MANUFACTURED TO THE LATEST ISO STANDARD FOR NINE (9) HIGH STACKING

| | LENGTH | | HEIGHT | | WIDTH | | DOOR OPENING | |
|--------|-------------|------------|----------|-----------|--------------|-----------|----------------|-----------|
| | Exterior | Interior | Exterior | Interior | Exterior | Interior | Height | Width |
| Ft in | 40' 0" | 38' 0 3/4" | 8' 6" | 7' 3 5/8" | 8' 0" | 7' 5 5/8" | 7' 6 1/2" | 7' 5 5/8" |
| Metric | 12,192 | 11,602 | 2,591 | 2,226 | 2,438 | 2,276 | 2,299 | 2,276 |
| | TARE WEIGHT | | PAYLOAD | | GROSS WEIGHT | | CUBIC CAPACITY | |
| Lbs | 9,590 | | 57,610 | | 67,200 | | 2,076 Cu. Ft. | |
| Kgs | 4,350 | | 26,130 | | 30,480 | | 58.8 Cu. M. | |

ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS