




# Tricon Dry Freight ISO Cargo Container Double Doors Both Ends (Type V)

**SB825-0-CT**  
Tricon Dry Freight ISO Cargo Container  
Double Doors Both Ends (Type V)

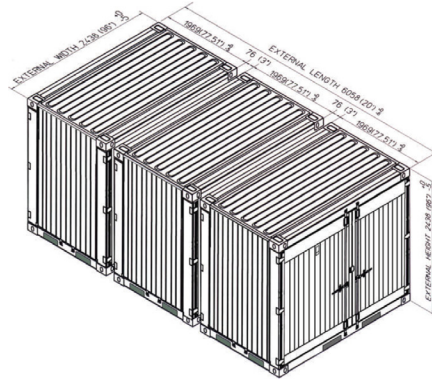

(3) TRICON CONTAINERS COUPLED TOGETHER TO FORM (1) 20' ISO MODULE

## PRODUCT FEATURES

### STANDARD FEATURES

- LOWEST TARE WEIGHT and LARGEST CUBIC CAPACITY for any Tricon Type V
- Full-width cargo doors on both ends, (swing out a full 270 deg. For ease of loading)
- Four way fork lift pockets
- Wall tie down steel lashing rings, 4,000 lbs. cap. Each (16) total
- Door corner post tie downs, (20) total = restraint system shoring slot will support 2" x 6" lumber
- Vents, (2) each
- Document holder, (2) each

- Connecting couplers, (3) per Tricon
- Connecting coupler storage bracket, (1) each
- Adjustable shelving brackets, (3) sets: (6) vertical E-Track sections total
- Military Standard 595B 33446 CARC TAN Exterior Paint

### OPTIONAL FEATURES

- Decking and shoring beams, (15) each
- Rack and Cabinet systems

060711-R00

### ALL NEW CONTAINERS ARE MANUFACTURED TO THE LATEST ISO STANDARD

	LENGTH		HEIGHT		WIDTH		DOOR OPENING	
	Exterior	Interior	Exterior	Interior	Exterior	Interior	Height	Width
<b>Ft in</b>	6' 5 1/2"	6' 1/2"	8' 0"	7' 4 15/16"	8' 0"	7' 6 9/16"	6' 11 21/32"	7' 8 11/64"
<b>Metric</b>	1,969	1,981	2,438	2,259	2,438	2,306	2,125	2,341

	TARE WEIGHT	PAYLOAD	GROSS WEIGHT	CUBIC CAPACITY
<b>Lbs</b>	2,900	12,000	14,900	354 Cu. Ft.
<b>Kgs</b>	1,315	5,445	6,760	10.02 Cu. M.

ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS

ISO 9001:2008



CERTIFIED QUALITY MANAGEMENT SYSTEM