



SEA BOX[®]


10' X 8' Bicon Dry Freight ISO Cargo Container Double Doors Both Ends (TYPE 2)

SB842.0.SC.2TS
10' X 8' Bicon Dry Freight ISO Cargo Container
Double Doors Both Ends (TYPE 2)

PRODUCT FEATURES

STANDARD FEATURES

- LOWEST TARE WEIGHT and LARGEST CUBIC CAPACITY for any Bicon
- Full-width cargo doors on both ends, (swing out a full 270 degrees for ease of loading)
- (4) way fork lift pockets
- Wall tie down steel lashing rings, 4,000 lbs. cap. each (16 total)
- Door sill, recessed tie down steel lashing rings, 4,000 lbs. cap. each (4) total
- Adjustable shelving brackets (4) sets:
- (8) vertical E-track sections total
- (2) each transverse shelf, half, rated at 2,000 lbs. per half shelf
- (4) each Shoring and Deck beams
- Connecting couplers, (2) per Bicon
- Connecting coupler storage bracket (1) each
- Vents, (2) each
- Customer's choice of standard exterior paint colors

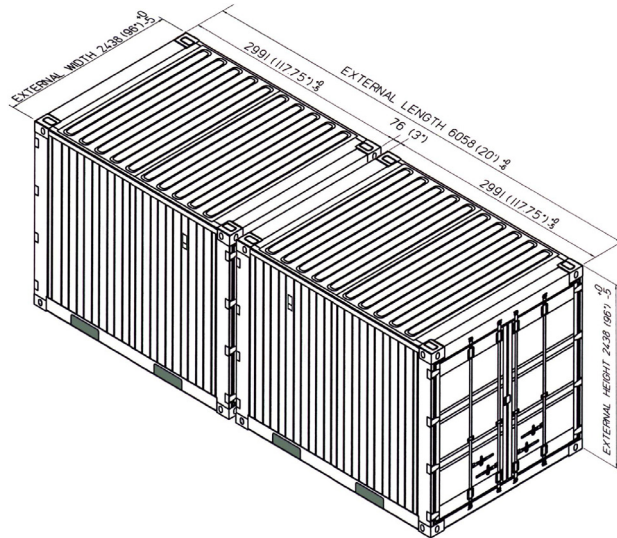

(2) Bicon Containers coupled together to form (1) 20' ISO module

OPTIONAL FEATURES

- Door corner post tie downs (20 total) = restraint system, shoring slot will support 2" x 6" lumber
- Document holder (2) each
- Rack & Cabinet systems

000000-R00

ALL NEW CONTAINERS ARE MANUFACTURED TO THE LATEST ISO STANDARD

	LENGTH		HEIGHT		WIDTH		DOOR OPENING	
	Exterior	Interior	Exterior	Interior	Exterior	Interior	Height	Width
Ft in	9' 9 3/4"	9' 1 3/8"	8' 0"	7' 4 15/16"	8' 0"	7' 8 11/64"	7' 1"	7' 8 11/64"
Metric	2,991	2,778	2,438	2,259	2,438	2,341	2,160	2,341

	TARE WEIGHT	PAYLOAD	GROSS WEIGHT	CUBIC CAPACITY
Lbs	3,250	23,205	26,455	517 Cu. Ft.
Kgs	1,474	10,525	12,000	14.6 Cu. M.

ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS

ISO 9001:2008



CERTIFIED QUALITY
MANAGEMENT SYSTEM