




## 20' x 8' 0" Dry Freight ISO Cargo Container Double Doors Both Ends

**SB862-0-C (FORMERLY SB865.0-C)**  
20' x 8' 0" Dry Freight ISO Cargo Container  
Double Doors Both Ends

### PRODUCT FEATURES

#### STANDARD FEATURES

- Corrugated steel sides, roof and swing doors on both ends
- (2) sets of forklift pockets, laden and unladen
- 1 1/8" thick marine plywood floors, forklift tested to 16,000 lbs. per 44 square inches
- Wall tie down steel lashing rings, 4,000 lbs. cap. Each, (24 total) tested at 6,000 lbs.
- Front corner post tie downs, (10 total)
- Door corner post tie downs, (10 total) = restraint system shoring slot will support 2" x 6" lumber
- Vents, (2) each
- Manifest box, (2) each
- Military Standard 595B CARC GREEN 34094 or 595B CARC TAN 33446 exterior paint
- Technical Manual
- Performance purchase description # ATDP2339
- Shoring slot system behind cargo doors

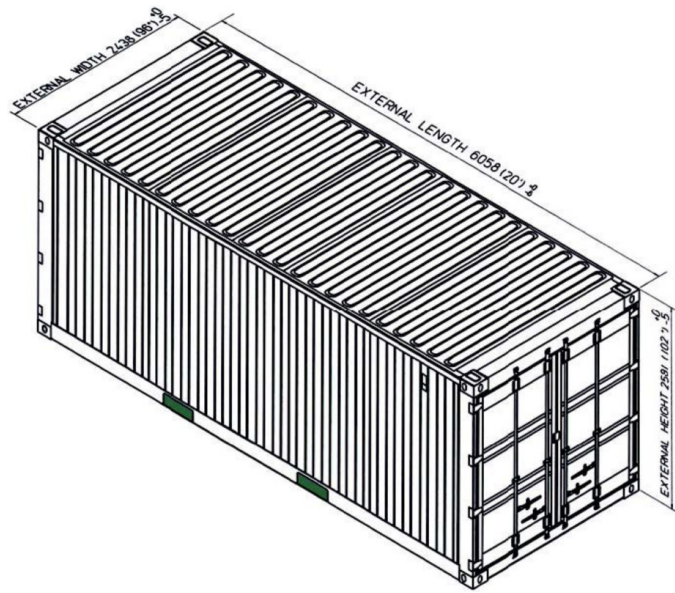

#### OPTIONAL FEATURES

- Decompression Vents
- Closeable Vents
- Storage Cabinets
- Gun Racks
- Electric power entry port

NSN #: 8145-01-552-0715

#### ALL NEW CONTAINERS ARE MANUFACTURED TO THE LATEST ISO STANDARD

	LENGTH		HEIGHT		WIDTH		DOOR OPENING	
	Exterior	Interior	Exterior	Interior	Exterior	Interior	Height	Width
<b>Ft in</b>	19' 10 1/2"	19' 2 1/16"	8' 0"	7' 10 1/4"	8' 0"	7' 8 1/2"	7' 5 5/8"	7' 8 1/8"
<b>Metric</b>	6,058	5,844	2,438	2,394	2,438	2,350	2,276	2,340

	TARE WEIGHT	PAYLOAD	GROSS WEIGHT	CUBIC CAPACITY
<b>Lbs</b>	5,450	47,460	52,910	1,161 Cu.Ft.
<b>Kgs</b>	2,472	21,528	24,000	32.8 Cu.M.

ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS

ISO 9001:2008



CERTIFIED QUALITY  
MANAGEMENT SYSTEM