




20' x 8' 6" Dry Freight ISO Cargo Container Double Doors Both Ends

SB862-6-S (FORMERLY SB865.6.S)
 20' x 8' 6" Dry Freight ISO Cargo Container
 Double Doors Both Ends

PRODUCT FEATURES

STANDARD FEATURES

- Corrugated steel sides, roof and swing doors on both ends
- (2) sets of forklift pockets, laden and unladen
- 1 1/8" thick marine plywood floors, forklift tested to 16,000 lbs. per 44 square inches
- Wall tie down steel lashing rings, 4,000 lbs. cap. Each, (24 total) tested at 6,000 lbs.
- Front corner post tie downs, (10 total)
- Door corner post tie downs, (10 total) = restraint system shoring slot will support 2" x 6" lumber
- Vents, (2) each
- Manifest box, (2) each
- Military Standard 595B STANDARD GREEN 34094 or 595B STANDARD TAN 33446 exterior paint
- Technical Manual
- Performance purchase description # ATDP2339
- Shoring slot system behind cargo doors

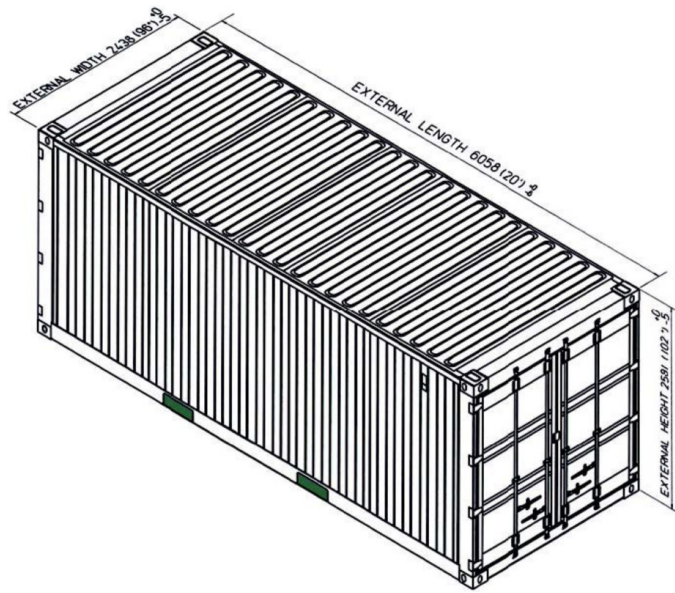

OPTIONAL FEATURES

- Decompression Vents
- Closeable Vents
- Storage Cabinets
- Gun Racks
- Electric power entry port

NSN #: 8145-01-552-0389

ALL NEW CONTAINERS ARE MANUFACTURED TO THE LATEST ISO STANDARD

	LENGTH		HEIGHT		WIDTH		DOOR OPENING	
	Exterior	Interior	Exterior	Interior	Exterior	Interior	Height	Width
Ft in	19' 10 1/2"	19' 2 1/16"	8' 6"	7' 10 1/4"	8' 0"	7' 8 1/2"	7' 5 5/8"	7' 8 1/8"
Metric	6,058	5,844	2,591	2,394	2,438	2,350	2,276	2,340

	TARE WEIGHT	PAYLOAD	GROSS WEIGHT	CUBIC CAPACITY
Lbs	5,450	47,460	52,910	1,161 Cu.Ft.
Kgs	2,472	21,528	24,000	32.8 Cu.M.

ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS

ISO 9001:2008



CERTIFIED QUALITY
MANAGEMENT SYSTEM