




20' x 8' Dry Freight ISO Cargo Container Double Doors Both Ends (Type 2)

SB862-6-ST-WR
20' x 8' Dry Freight ISO Cargo Container
Double Doors Both Ends (Type 2)

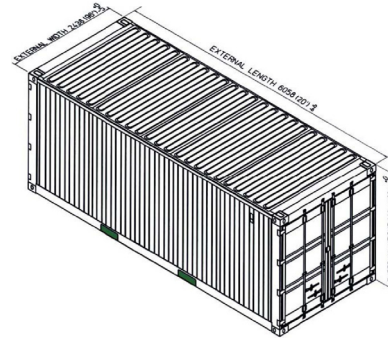

STANDARD PRODUCT FEATURES

- Corrugated steel sides, roof and swing doors on both ends
- (2) sets of forklift pockets, laden and unladen
- 1 1/8" thick marine plywood floors, forklift tested to 16,000 lbs. per 44 square inches
- Wall tie down steel lashing rings, 4,000 lbs. cap. Each, (24 total) tested at 6,000 lbs.
- Front corner post tie downs, (10 total)
- Door corner post tie downs, (10 total) = restraint system shoring slot will support 2" x 6" lumber
- Vents, (2) each
- Manifest box, (2) each
- Shoring slot system behind cargo doors
- Capable of secure storage and transport of Military Crew Serve Weapons
- Able to restrain (13) each, SB3451 Universal Weapons Rack for transport storage and rapid removal
- Adjustable, heavy-duty, aluminum decking/shoring beams
3,000 lbs. decking/vertical capacity
2,500 lbs. shoring/horizontal capacity
- Includes ratchet style, wide logistics straps for safe transport of items
- Technical Manual
- STANDARD TAN / Conventional Paint System 905

042611-R01

ALL NEW CONTAINERS ARE MANUFACTURED TO THE LATEST ISO STANDARD

	LENGTH		HEIGHT		WIDTH		DOOR OPENING	
	Exterior	Interior	Exterior	Interior	Exterior	Interior	Height	Width
Ft in	19' 10 1/2"	19' 2 1/16"	8' 6"	7' 10 1/4"	8' 0"	7' 8 1/2"	7' 5 5/8"	7' 8 1/8"
Metric	6,058	5,844	2,591	2,394	2,438	2,350	2,276	2,340

	TARE WEIGHT	PAYLOAD	GROSS WEIGHT	CUBIC CAPACITY
Lbs	5,450	47,460	52,910	1,161 Cu.Ft.
Kgs	2,472	21,528	24,000	32.8 Cu.M.

ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS

ISO 9001:2008



CERTIFIED QUALITY
MANAGEMENT SYSTEM

CONTRACT # GS-02F-0024P
GSA Advantage!