




## 40' X 9' 6" Refrigerated ISO Cargo Container

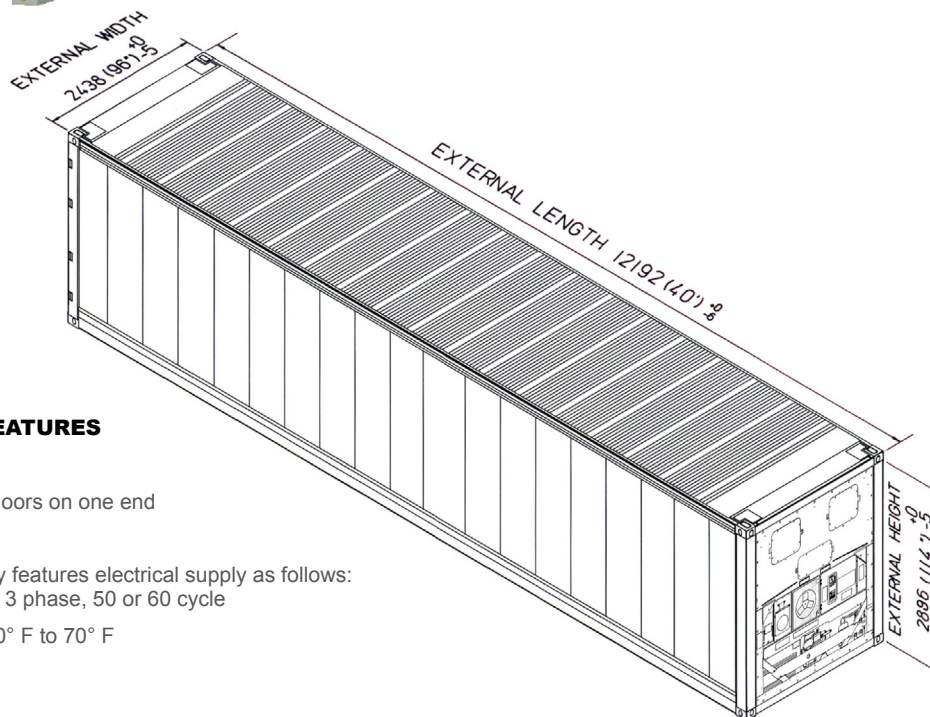

### STANDARD PRODUCT FEATURES

- Aluminum, steel or sides
- Double full opening swing doors on one end
- Aluminum T-grade floors
- Most refrigerated machinery features electrical supply as follows:  
208/230, 380/460 Volts AC, 3 phase, 50 or 60 cycle
- Temperature range from -20° F to 70° F

**SB561.9**  
40' X 9' 6" Refrigerated  
ISO Cargo Container

000000-R00

### ALL NEW CONTAINERS ARE MANUFACTURED TO THE LATEST ISO STANDARD FOR NINE (9) HIGH STACKING

	LENGTH		HEIGHT		WIDTH		DOOR OPENING	
	Exterior	Interior	Exterior	Interior	Exterior	Interior	Height	Width
Ft in	40' 0"	38' 0 3/4"	9' 6"	8' 3 5/8"	8' 0"	7' 5 5/8"	8' 6 1/2"	7' 5 5/8"
Metric	12,192	11,602	2,896	2,531	2,438	2,276	2,603	2,276
		TARE WEIGHT	PAYLOAD	GROSS WEIGHT	CUBIC CAPACITY			
Lbs		10,030	57,170	67,200	2,360 Cu. Ft.			
Kgs		4,550	25,930	30,480	66.8 Cu. M.			

ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS

ISO 9001:2008



CERTIFIED QUALITY  
MANAGEMENT SYSTEM

CONTRACT # GS-02F-0024P  
**GSA Advantage!**