




20' x 8'6" Refrigerated ISO Cargo Container

SB8140.6
20' x 8'6" Refrigerated ISO Cargo Container

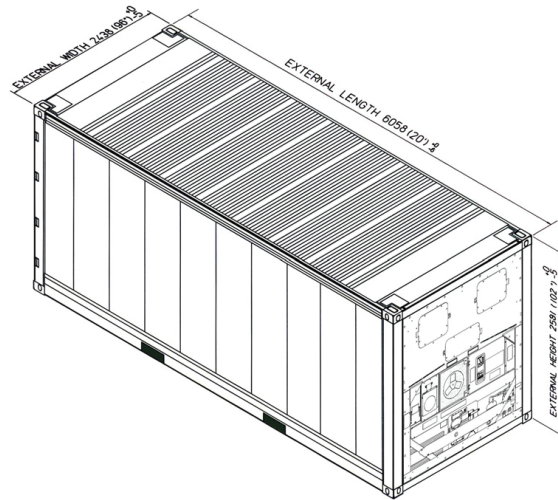

STANDARD FEATURES

- Stainless steel interior wall lining
- Double swing doors on one end
- Aluminum T-Grade floors
- (2) Fork lift pockets
- Carrier Refrigeration Unit (Model #69NT-40)
- Temperature range from -20°F to 70°F
- 380/460 Volts AC, 3 phase, 50 or 60 cycle
- Zero-ODP HFC-134a
- 30ft power cables provided
- Main power circuit breaker
- ABS Certification
- Microlink III (ML3) microprocessor controller with power up and integral DataCORDER (365 days) for state fo the art temperature control
- Industry-leading low air leakage: less than 0.14 CMH (5 CFH) at 50.8 mm (2 in.) W.g.
- Removable front service panels
- Forklift pockets to easily replace machines
- Document holder with waterproof door
- 50-50 Doors

OPTIONAL FEATURES

- Quick-Connect dual voltage transformer 208/230 Volts AC, 3 phase, 50 or 60 cycle
- Interior light with switch
- Panic alarm
- LED lighting
- EZ-open door with single locking bar and extended handle
- Butcher door
- Side door
- Roll-up door
- Inside release
- Air curtains
- Dual voltage transformer 230V 3-phase 60 amps
- Flat Floor
- 1/3-2/3 doors

ALL NEW CONTAINERS ARE MANUFACTURED TO THE LATEST ISO STANDARDS

	LENGTH		HEIGHT		WIDTH		DOOR OPENING	
	Exterior	Interior	Exterior	Interior	Exterior	Interior	Height	Width
Ft in	19' 10 1/2"	18' 37/64"	8' 6"	7' 5 31/64"	8' 0"	7' 6 5/16"	7' 5 9/64"	7' 6 5/32"
Metric	6,058	5,501	2,591	2,273	2,438	2,294	2,264	2,290
	TARE WEIGHT		PAYLOAD		GROSS WEIGHT		CUBIC CAPACITY	
Lbs	6,370		60,830		67,200		1,018 Cu.Ft.	
Kgs	2,890		27,590		30,480		28.7 Cu.M.	

ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS

080423-R00

ISO 9001



CERTIFIED QUALITY MANAGEMENT SYSTEM

CONTRACT # GS-02F-0024P
GSA Advantage!