




## 20ft X 8ft Refrigerated ISO Cargo Container



**SB541-0-LFRS**  
20ft X 8ft Refrigerated ISO Cargo Container

### STANDARD PRODUCT FEATURES

- Double swing doors with padlocks
- Air curtain
- Emergency escape hatch
- Forklift pockets (2 sets; 1 laden, 1 set special unladen)
- Aluminum T-grade floors
- Four (4) rows of "E" Track cargo restraint system along interior side walls of container (these may all be used for numerous tie downs)
- Six (6) cargo tie downs (along both wall in the floor)
- Six (6) cargo tie downs high up on both walls (24 total tie down)
- Interior electrical lighting system
- Access steps to non-slip roof
- Pressure relief port installed in rear cargo door panel
- Carrier refrigerated machinery features electrical supply as follows: 180/250, 360/500 Volts AC, 3 phase, 50/60hz cycle
- Temperature range from -22°F to +86°F

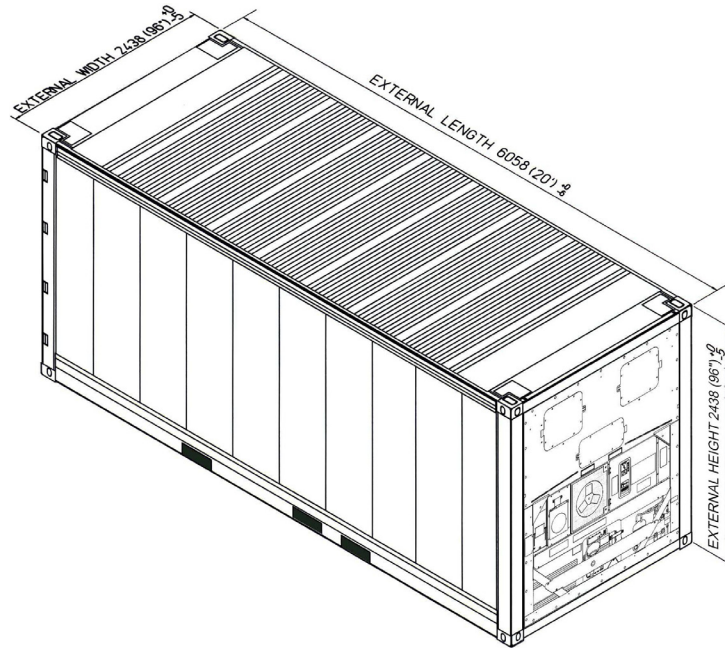

000000-R00

### ALL NEW CONTAINERS ARE MANUFACTURED TO THE LATEST ISO STANDARD FOR NINE (9) HIGH STACKING

	LENGTH		HEIGHT		WIDTH		DOOR OPENING	
	Exterior	Interior	Exterior	Interior	Exterior	Interior	Height	Width
Ft in	19' 10 1/2"	18' 3/8"	8' 0"	6' 11 5/16"	8' 0"	7' 6 5/16"	6' 9 25/32"	7' 6 5/16"
Metric	6,058	5,496	2,438	2,116	2,438	2,294	2,077	2,294

	TARE WEIGHT	PAYLOAD	GROSS WEIGHT	CUBIC CAPACITY
Lbs	7,720	45,190	52,910	944 Cu. Ft.
Kgs	3,502	29,498	24,000	26.7 Cu. M.

ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS

ISO 9001:2008



CERTIFIED QUALITY  
MANAGEMENT SYSTEM